

# Dollies

## Wood Dollies



- Constructed from select kiln-dried hardwoods to prevent warping and shrinkage.
- All boards are cut and planed to 7/8" with guaranteed consistent quality.
- Four, 3" polyolefin swivel casters offer 900 lb. capacity. (See caster options for up to 1,400 lb. capacity.)
- Shipped fully assembled.

Hardwood deck with countersunk bolt holes for a smooth working surface

Smooth open deck style features 7/8" thick, 4" wide rails for heavy-duty service



Non-marking, 3" swivel casters with polyolefin wheels have exceptional impact resistance

Zinc-plated rigs and hardware are resistant to corrosion

### Solid Dolly

- Three cross battens on 36" and 48" length.
- Smooth, treated deck with countersunk bolts.
- Deck boards run lengthwise.



| Model No. | Size    |            | Wt.     |
|-----------|---------|------------|---------|
|           | Inches  | mm         |         |
| RD2416S3P | 24 x 16 | 610 x 406  | 17 lbs. |
| RD2718S3P | 27 x 18 | 686 x 457  | 21 lbs. |
| RD3018S3P | 30 x 18 | 762 x 457  | 23 lbs. |
| RD3624S3P | 36 x 24 | 914 x 610  | 29 lbs. |
| RD4824S3P | 48 x 24 | 1219 x 610 | 36 lbs. |

### Carpet End Dolly

- Padded carpeting protects furniture and appliances.



| Model No.  | Size    |           | Wt.     |
|------------|---------|-----------|---------|
|            | Inches  | mm        |         |
| RD3018CE3P | 30 x 18 | 762 x 457 | 16 lbs. |
| RD3624CE3P | 36 x 24 | 914 x 610 | 17 lbs. |

### Flush Dolly

- Full, 4" wide by 1 3/4" thick double length rails.
- Smooth, open deck.



| Model No. | Size    |            | Wt.     |
|-----------|---------|------------|---------|
|           | Inches  | mm         |         |
| RD2416F3P | 24 x 16 | 610 x 406  | 16 lbs. |
| RD2718F3P | 27 x 18 | 686 x 457  | 17 lbs. |
| RD3018F3P | 30 x 18 | 762 x 457  | 19 lbs. |
| RD3624F3P | 36 x 24 | 914 x 610  | 21 lbs. |
| RD4824F3P | 48 x 24 | 1219 x 610 | 26 lbs. |

### Rubber Cap Dolly

- Non-skid reinforced 3" wide rubber caps keep slippery loads in place without damage.



| Model No.  | Size    |           | Wt.     |
|------------|---------|-----------|---------|
|            | Inches  | mm        |         |
| RD2718RC3P | 27 x 18 | 686 x 457 | 15 lbs. |
| RD3018RC3P | 30 x 18 | 762 x 457 | 16 lbs. |

### Regular Dolly

- Strength and reliability at an economy price.
- All rails are 4" wide.



| Model No. | Size    |           | Wt.     |
|-----------|---------|-----------|---------|
|           | Inches  | mm        |         |
| RD2416R3P | 24 x 16 | 610 x 406 | 13 lbs. |
| RD3018R3P | 30 x 18 | 762 x 457 | 15 lbs. |
| RD3624R3P | 36 x 24 | 914 x 610 | 16 lbs. |

### All Carpet Solid Dolly

- Strength and reliability at an economy price.
  - Fully carpeted<sup>‡</sup> deck prevents damage to cargo.
- <sup>‡</sup>Pattern of carpet may vary.



| Model No.  | Size    |           | Wt.     |
|------------|---------|-----------|---------|
|            | Inches  | mm        |         |
| RD3018AC3P | 30 x 18 | 762 x 457 | 23 lbs. |
| RD3624AC3P | 36 x 24 | 914 x 610 | 32 lbs. |

### Dolly Options:



**Wheel Locks**  
Brake kits installed on 2 swivel casters.



**Tow Eye R1495**  
**Tow Handle R2515**


### Caster Options\*

| Model No.   | Description                           | Capacity  |
|---|---------------------------------------|-----------|
| 3P <sup>‡</sup>   | 3" Polyolefin Casters                 | 900 lbs.  |
| 4P  | 4" Polyolefin Casters                 | 1200 lbs. |
| 5P  | 5" Polyolefin Casters                 | 1400 lbs. |
| 3R  | 3 1/2" Non-Marking Rubber Casters     | 900 lbs.  |
| 4R  | 4 1/2" Non-Marking Rubber Casters     | 1100 lbs. |
| 5R  | 5 1/2" Non-Marking Rubber Casters     | 1350 lbs. |
| <b>Brake kits installed on two swivel casters – optional (non-returnable)</b> |                                       |           |
| R1130   | 3" Brake Kits for Hard Rubber Casters |           |
| R1151   | 3" Brake Kits for Polyolefin Casters  |           |

\*See page 65 for full description of casters and wheels.

<sup>‡</sup>Standard casters.

### Deck Heights by Caster Size:

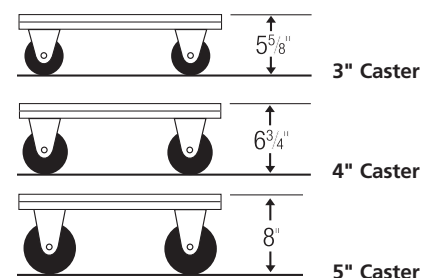

# Polyethylene Dollies



Plate-style 4" polyolefin swivel casters for maximum maneuverability and easy replacement

- High-impact, durable polyethylene construction.
- Easy to clean, non-porous platform will not rot, mildew, or splinter.
- 1,200 lb. weight capacity.
- Quick, easy assembly.
- Colors: Blue, Gray, or Yellow.



Flush Deck

1,200 lb. weight capacity – steel reinforced, one-piece deck design.



Padded Deck

## Polyethylene Dollies

| Model No.     | Description                     | Dimensions (LxW) |           | Caster Type*  | Overall Height |     | Weight Capacity |
|---------------|---------------------------------|------------------|-----------|---------------|----------------|-----|-----------------|
|               |                                 | Inches           | mm        |               | Inches         | mm  |                 |
| RMD3018F4PNA  | Flush Polyethylene w/ Casters   | 30 x 18          | 762 x 457 | 4" Polyolefin | 7 3/4"         | 222 | 1200 lbs.       |
| RMD3018RC4PNA | Padded Polyethylene w/ Casters  | 30 x 18          | 762 x 457 | 4" Polyolefin | 8 3/4"         | 222 | 1200 lbs.       |
| RMD3018FNA    | Flush Polyethylene w/o Casters  | 30 x 18          | 762 x 457 | –             | 2 3/4"         | 197 | –               |
| RMD3018RCNA   | Padded Polyethylene w/o Casters | 30 x 18          | 762 x 457 | –             | 3 3/4"         | 197 | –               |

\*See page 65 for full description of casters and wheels. Specify color when ordering.

# Steel Dollies

- Open structural angle dollies, 1 1/2" x 1 1/2" x 3/16".
- Durable, powder-coated finish.
- Solid decks are smooth, 13-gauge steel.
- 1 1/2" lip turned down for a smooth surface. Order lips up for a contained area.




Solid Deck Lips Down



Open Angle Lips Down



Solid Deck Lips Up



Open Angle Lips Up

## Steel Dollies

| Lips Down Model No.                | Lips Up Model No. | Capacity  | Caster Type* | Caster Size |          | Deck Height |     |
|------------------------------------|-------------------|-----------|--------------|-------------|----------|-------------|-----|
|                                    |                   |           |              | Inches      | mm       | Inches      | mm  |
| <b>Solid Dolly</b>                 |                   |           |              |             |          |             |     |
| RD843HR                            | RU843HR           | 900 lbs.  | Polyolefin   | 3 x 1 1/4   | 76 x 32  | 3 7/8       | 98  |
| RD843SS                            | RU843SS           | 1000 lbs. | Semi-Steel   | 3 x 1 1/4   | 76 x 32  | 3 7/8       | 98  |
| RD844HR                            | RU844HR           | 1200 lbs. | Polyolefin   | 4 x 1 1/2   | 102 x 38 | 5 1/8       | 130 |
| RD844SS                            | RU844SS           | 1600 lbs. | Semi-Steel   | 4 x 1 1/2   | 102 x 38 | 5 1/8       | 130 |
| <b>Open Angle Structural Dolly</b> |                   |           |              |             |          |             |     |
| RD853HR                            | RU853HR           | 900 lbs.  | Polyolefin   | 3 x 1 1/4   | 76 x 32  | 4           | 102 |
| RD853SS                            | RU853SS           | 1000 lbs. | Semi-Steel   | 3 x 1 1/4   | 76 x 32  | 4           | 102 |
| RD854HR                            | RU854HR           | 1200 lbs. | Polyolefin   | 4 x 1 1/2   | 102 x 38 | 5 1/4       | 133 |
| RD854SS                            | RU854SS           | 1600 lbs. | Semi-Steel   | 4 x 1 1/2   | 102 x 38 | 5 1/4       | 133 |

\*See page 65 for full description of casters and wheels.

### DECK SIZES


16" x 27" 18" x 30"  
18" x 24" 24" x 36"

Specify size when ordering.

### Wheel Specifications:



3" x 1 1/4", 4" x 1 1/2" Polyolefin



3" x 1 1/4", 4" x 1 1/2" Semi-Steel



4" x 1 1/4" Resilex

# Aluminum Dollies

- Corrosion resistant, lightweight, and durable.
- 1 1/2" lip turned down for a smooth surface or lips up for a contained area.
- Deck is bolted together with galvanized fasteners.
- Bolt-on swivel casters.
- Ships completely assembled and ready to use.



Lips Down



Lips Up

## Aluminum Dollies

| Model No.        | Capacity  | Caster Type* | Caster Size |          | Deck Height |     |
|------------------|-----------|--------------|-------------|----------|-------------|-----|
|                  |           |              | Inches      | mm       | Inches      | mm  |
| <b>Lips Down</b> |           |              |             |          |             |     |
| RDADRX4          | 1200 lbs. | Resilex      | 4 x 1 1/4   | 102 x 32 | 6 3/4       | 171 |
| RDADP4           | 1200 lbs. | Polyolefin   | 4 x 1 1/4   | 102 x 32 | 6 3/4       | 171 |
| <b>Lips Up</b>   |           |              |             |          |             |     |
| RDAURX4          | 1200 lbs. | Resilex      | 4 x 1 1/4   | 102 x 32 | 8           | 203 |
| RDAP4            | 1200 lbs. | Polyolefin   | 4 x 1 1/4   | 102 x 32 | 8           | 203 |

### DECK SIZES

36" x 24" 30" x 18"  
24" x 18"

Specify size when ordering.

\*See page 65 for full description of casters and wheels.

# Drum Dollies

- For the ease of rolling 30 and 55-gallon drums.
- Durable, powder-coat finish.



Drums load easily onto this cross-style dolly.



### Cross-Style

| Model No. | Wheel Type           | Load Capacity | Diameter |
|-----------|----------------------|---------------|----------|
| R9030HR   | 3" Swivel Polyolefin | 900 lbs.      | 20¼" ID  |
| R9030SS   | 3" Swivel Semi-Steel | 1000 lbs.     | 20¼" ID  |
| R9055HR   | 5" Swivel Polyolefin | 1500 lbs.     | 24¼" ID  |



### Ring Dollies

| Model No. | Wheel Type           | Load Capacity | Diameter |
|-----------|----------------------|---------------|----------|
| R9230HR   | 3" Swivel Polyolefin | 900 lbs.      | 19½" ID  |
| R9255HR   | 3" Swivel Polyolefin | 900 lbs.      | 23½" ID  |
| R9255SS   | 3" Swivel Semi-Steel | 1000 lbs.     | 23½" ID  |
| R9255HR   | 5" Swivel Polyolefin | 1500 lbs.     | 23¼" ID  |

# Drum Racks

- Allows for easy handling and storage of 3 drums.
- Saves storage space.
- Heavy-duty welded steel construction with durable, powder-coat finish.
- Accessible with fork lift from all sides.
- Racks can be stacked to store additional drums.



Curved feet allow stacking of full racks 5 high

Heavy-duty welded steel

4-way fork entry

### Drum Racks


| Model No. | Description     | Size (H x W x L) |                  | Single Rack Load Capacity |
|-----------|-----------------|------------------|------------------|---------------------------|
|           |                 | Inches           | mm               |                           |
| R993      | Three-Drum Rack | 10 x 74 x 28     | 254 x 1880 x 711 | 2400 lbs.                 |

# Drum Cradles

- Drum cradles allow easy transport and draining of 55-gallon drums.
- Single and dual handles retract for storage.
- Cradles support loads to 600 lbs.
- Some assembly required.
- Model R91HW2 has swivel casters to allow easier turning in limited space. Two handles provide greater stability and operator control.



Drain 55-gallon drums easily with drum cradles.

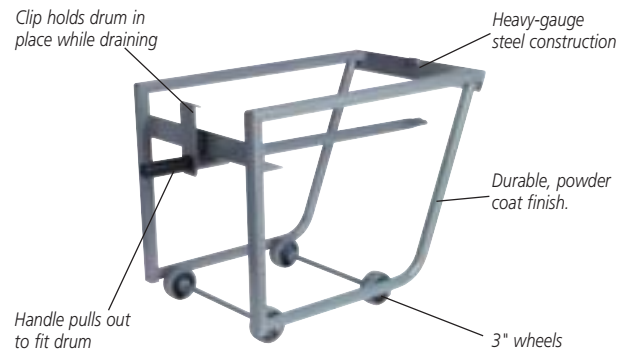

### Drum Cradles

| Model No. | Description   |
|-----------|---|
| R91HW     | With 1 Handle and 4 Rigid Wheels                    |
| R91HW2*   | With 2 Handles and 2 Swivel Casters, 2 Rigid Wheels |

\*Standard size